


**COMMANDER Omni Fiberglass Antenna, 30-35, 2.1 dBi, N Female**

 Please visit us on the internet at <http://www.commandertech.com>
**Product Description**

The 1142 is a narrow band unity gain antenna built to a specific spot frequency requirement to effectively reduce interference from other near frequency transmitters. Of rugged, two-piece construction, the antenna's lower section is enclosed in heavy-wall fiberglass tubing. The upper whip is fiberglass and attaches in the field with a protected 1/2" x 20 threaded connector. This unit provides the advantages of DC ground lightning protection, versatility, installation ease and requires no ground plane elements to decouple from the support structure


 1142 Series

**Features/Benefits**

Rugged construction assures system reliability  
 High selectivity limits interference from nearby systems

**Technical Specifications**

Frequency Band	25-299.9 MHz
Horizontal Pattern	Omni Directional
Antenna Type	Fiberglass Omni
Electrical Down Tilt Option	Fixed
Gain, dBi (dBd)	2.1 (0)
Frequency Range, MHz	30-35
Connector Type	N Female
Connector Location	Bottom
Mounting Type	Fixed
Electrical Down Tilt, deg	0
Orientation	N/A
Mounting Hardware	46 Clamp Set
Rated Wind Speed, km/h (mph)	160 (100)
Gain (Omni), dBi (dBd)	2.14 (0)
VSWR	< 1.5 : 1
Vertical Beamwidth, deg	75
Polarization	Vertical
Maximum Power Input, W	250
Lightning Protection	Direct Ground
3rd Order IMP @ 2 x 43 dBm, dBc	N/A
Impedance, Ohms	50
Overall Length, m (ft)	4.88 (16)
Element Housing Length, m (ft)	4.57 (15)
Mounting Pipe Diameter, m (in)	0.04 (1.66)
Support Pipe Length, m (ft)	0.3 (1)
Weight, kg (lb)	5 (10)
Radiating Element Material	Copper Alloy
Element Housing Material	Fiberglass
Support Pipe Material	6061 - T6 Aluminum
Max Wind Loading Area m <sup>2</sup> (ft <sup>2</sup> )	0.073 (0.79)
Survival Wind Speed, km/h (mph)	200 (125)
Bend Mom @ Rated Wind 1" Below Top of Mt Pipe, N m (ft lbf)	330 (243)
Wind Load - Side @ Rated Wind, N (lbf)	142 (32)
Shipping Weight, kg (lb)	10.9 (24)
Packing Dimensions, HxWxD mm (in)	3600 x 100 x 100 (141.73 X 3.94 X 3.94)
Packing Dimensions, HxWxD, m (ft)	3.6 x 0.1 x 0.1 (11.8 x 0.33 x 0.33)
Shipping Dimensions of Accessory, HxWxD, m (ft)	0.5 x 0.10 x 0.10 (1.8 x 0.33 x 0.33)
Shipping Mode	Common Carrier / UPS

**Notes**


Specify Center Frequency

All information contained in this datasheet is subject to confirmation at time of ordering

COMMANDER Omni Fiberglass Antenna, 30-35, 2.1 dBi, N Female

Please visit us on the internet at <http://www.commandertech.com>

**Other Documentation**

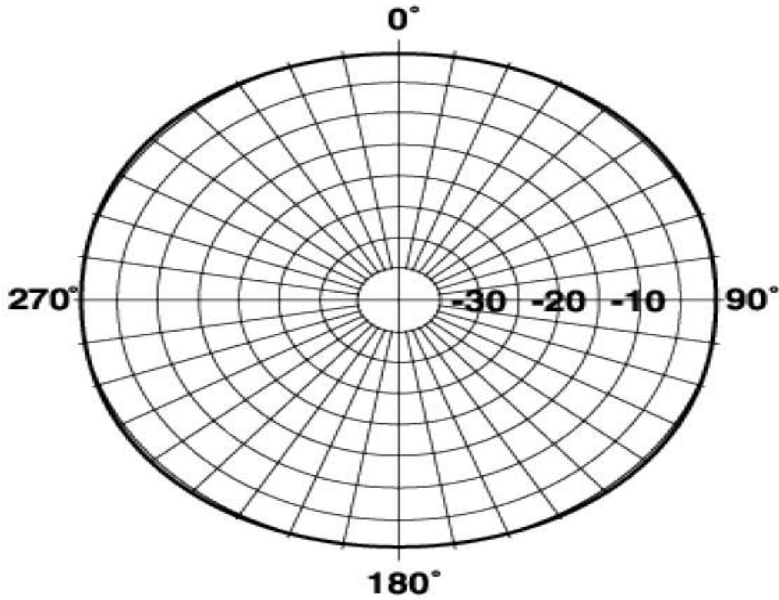

All information contained in this datasheet is subject to confirmation at time of ordering